


# ° AirRay® Cortical Electrode

## PRODUCT CATALOGUE

Electrode for Clinical Diagnostics and Research



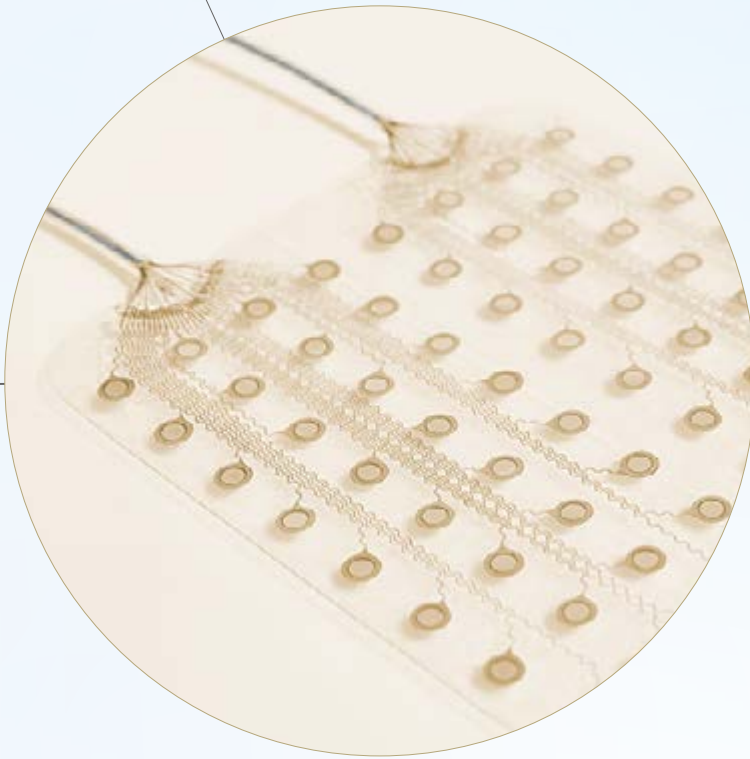

# Table of Contents

°AirRay

Page



Welcome!



Neuer Messplatz 3  
79108 Freiburg | Germany  
Fon: +49 761 70 888 222  
Fax: +49 761 70 888 399



### °AirRay – High Quality Electrode

°AirRay is our foil electrode for invasive neuromonitoring. It supports brain mapping as well as the monitoring of electrical brain signals, e.g. for the localization of epileptogenic foci for a short implantation period of < 30 days.

Thanks to CorTec's unique laser manufacturing process °AirRay electrodes are very soft, thin, and therefore flexible. Electrodes adapt well to the brain's curvature. °AirRay also provides increased patient safety due to the interlocking structure of its materials that prevents separation of electrode contacts.

### CorTec – Thinking ahead

As a young medical engineering company, CorTec focuses on innovations in the fields of neurotherapy and diagnostics.

Thinking ahead, we are developing the neurotechnology of tomorrow already today. On the following pages we would like to introduce you to CorTec's spectrum of °AirRay products.

Please contact us, if you are interested in an electrode configuration that is not in our catalogue.



We are happy to assist you!





°AirRay

Strip & Grid Electrodes

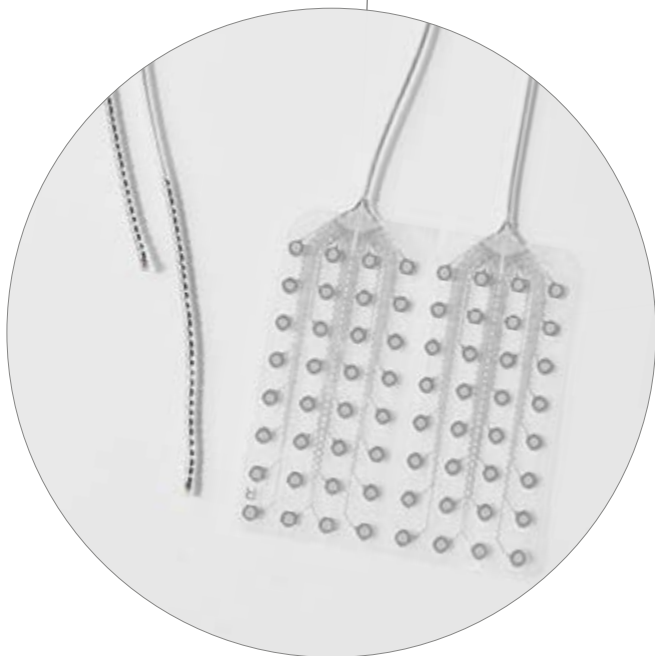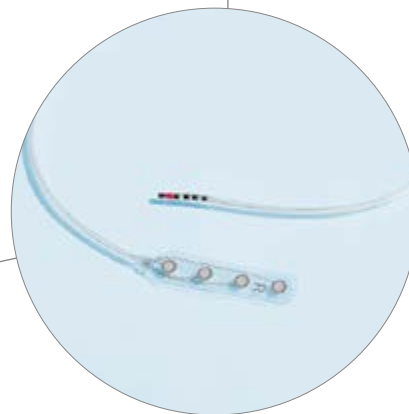

°AIRRAY CORTICAL ELECTRODE - CONFIGURATIONS


	1	2	3	4	5	6	7	8
1	-	-	-	-	-	-	-	-
2	-	-	x	x	x	x	x	x
3	-	-	x	x	x	x	x	x
4	x	x	x	x	x	x	x	x
5	x	x	x	x	x	x	x	x
6	x	x	x	x	x	x	x	x
7	x	x	x	x	x	x	x	x
8	x	x	x	x	x	x	x	x





# 1 x 4 Electrode

The 4-Contact Strip in its classic design. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

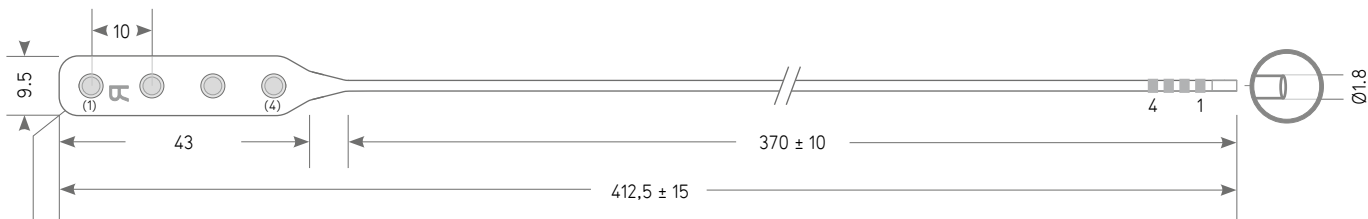

**View:**  
Contact openings  
facing upwards

### General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	black-green	2011.1023.01	8 Contacts	4031.1001.00
	black-orange	2011.1023.02	For more information on the connection system please see	
	individual	2011.1023.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 1 x 6 Electrode

The 6-Contact Strip in its classic design. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

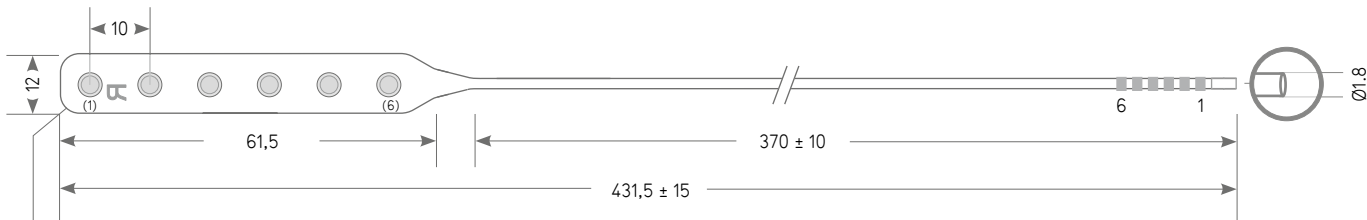

**View:**  
Contact openings  
facing upwards

### General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration			Accessory   Connection Cable	
Color Code	Catalogue No.		Catalogue No.	
Platinum-Iridium	black-blue	2011.1022.01	8 Contacts	4031.1001.00
	black-green	2011.1022.02	For more information on the connection system please see	
	individual	2011.1022.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 1 x 8 Electrode

The 8-Contact Strip in its classic design. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

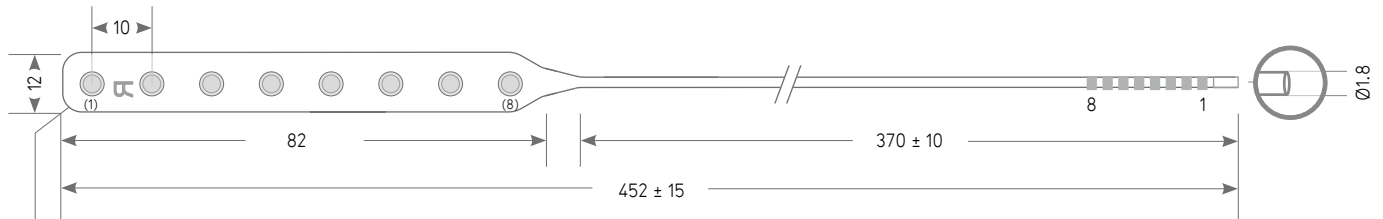

**View:**  
Contact openings  
facing upwards

## General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	black-red black-blue individual	2011.1021.01 2011.1021.02 2011.1021.03	8 Contacts For more information on the connection system please see	4031.1001.00


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 2 x 4 Electrode

Soft and thin structures for increased flexibility and adaptability: 8 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

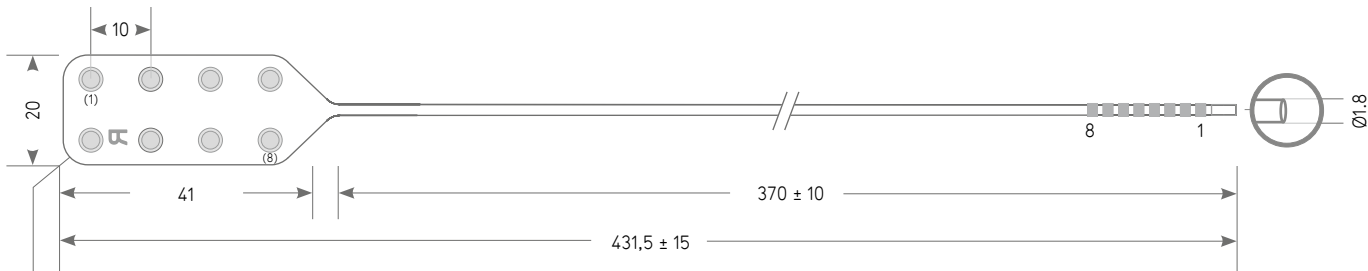

**View:**  
Contact openings  
facing upwards

**General Information:**

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration			Accessory   Connection Cable	
Color Code	Catalogue No.		Catalogue No.	
Platinum-Iridium	blue-yellow	2011.1020.01	8 Contacts	4031.1001.00
	blue-green	2011.1020.02	For more information on the connection system please see	
	individual	2011.1020.03		

Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.








# 2 x 5 Electrode

Soft and thin structures for increased flexibility and adaptability: 10 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf. .

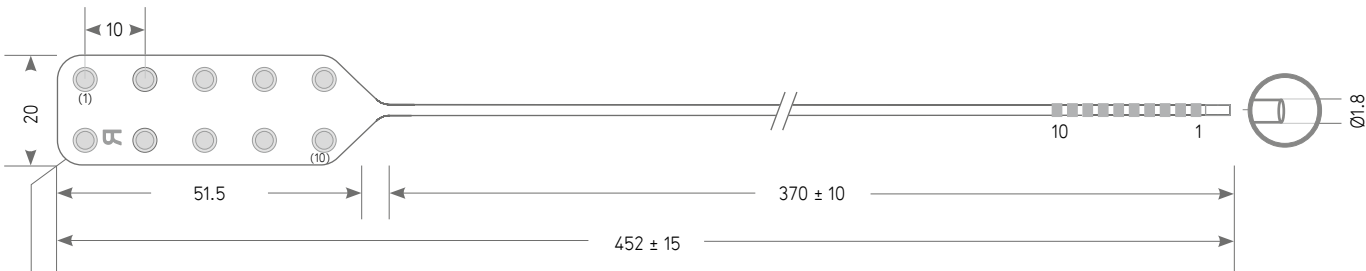

**View:**  
Contact openings  
facing upwards

**General Information:**

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on .

Product Configuration			Accessory   Connection Cable	
Color Code	Catalogue No.		Catalogue No.	
Platinum-Iridium	red-blue	2011.1033.01	16 Contacts	4031.1002.00
	red-yellow	2011.1033.02	For more information on the connection system please see .	
	individual	2011.1033.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 2 x 6 Electrode

Soft and thin structures for increased flexibility and adaptability: 12 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

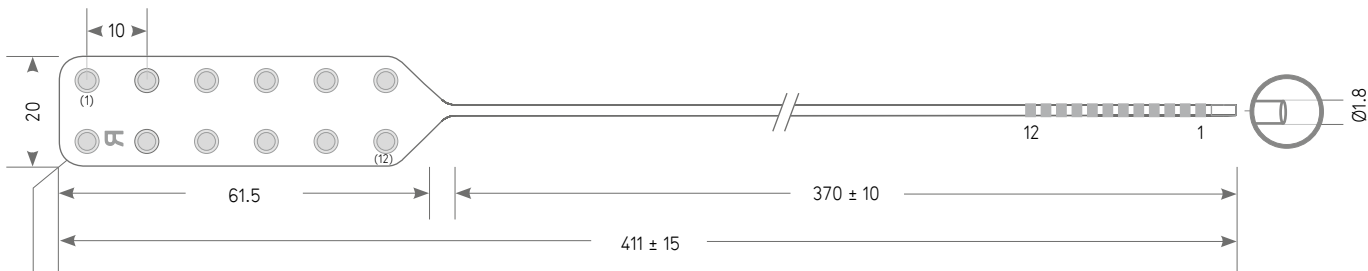

**View:**  
Contact openings  
facing upwards

### General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	green-yellow	2011.1035.01	16 Contacts For more information on the connection system please see	4031.1002.00
	green-blue	2011.1035.02		
	individual	2011.1035.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 2 x 8 Electrode

Soft and thin structures for increased flexibility and adaptability: 16 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

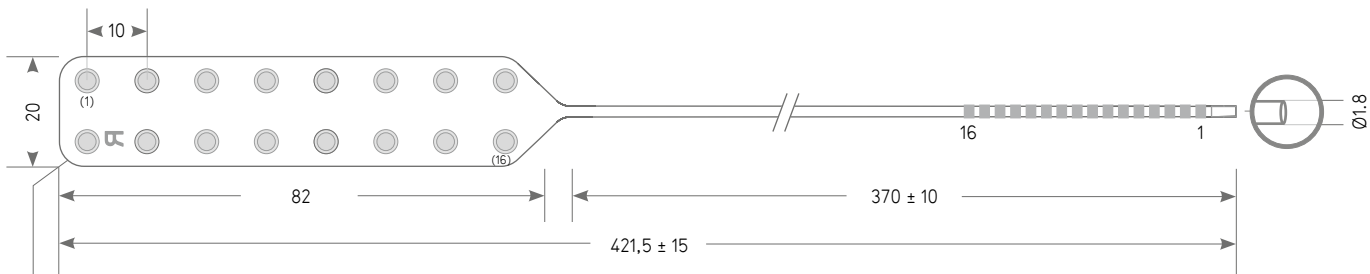

**View:**  
Contact openings  
facing upwards

- General Information:**
- R-Indicator on the electrode to identify top and bottom sides.
  - Product is intended for single use.
  - Connectors for the connection cable are included.
  - Product is supplied sterile.
  - Contact diameter is 4 mm in total (contact opening 2.7 mm).
  - Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	orange-blue	2011.1019.01	16 Contacts	4031.1002.00
	orange-yellow	2011.1019.02	For more information on the connection system please see	
	individual	2011.1019.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





## 4 x 4 Electrode

Soft and thin structures for increased flexibility and adaptability: 16 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

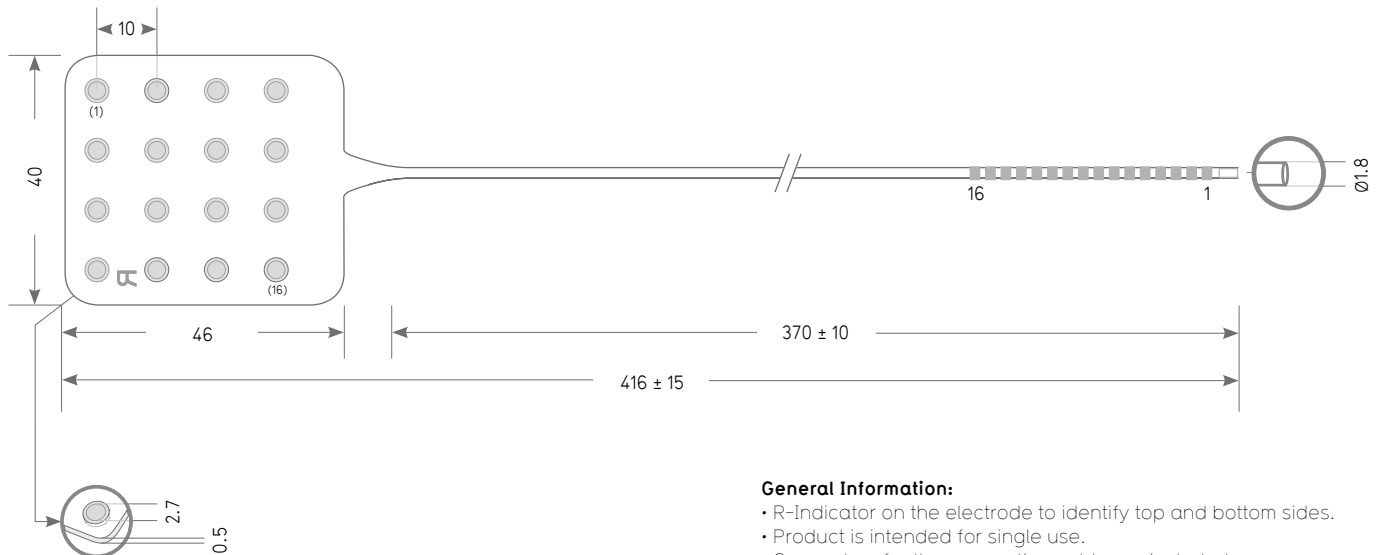

### View:

Contact openings facing upwards

### General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	orange-green	2011.1018.01	16 Contacts	4031.1002.00
	orange-black	2011.1018.02	For more information on the connection system please see	
	individual	2011.1018.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 4 x 5 Electrode

Soft and thin structures for increased flexibility and adaptability: 20 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

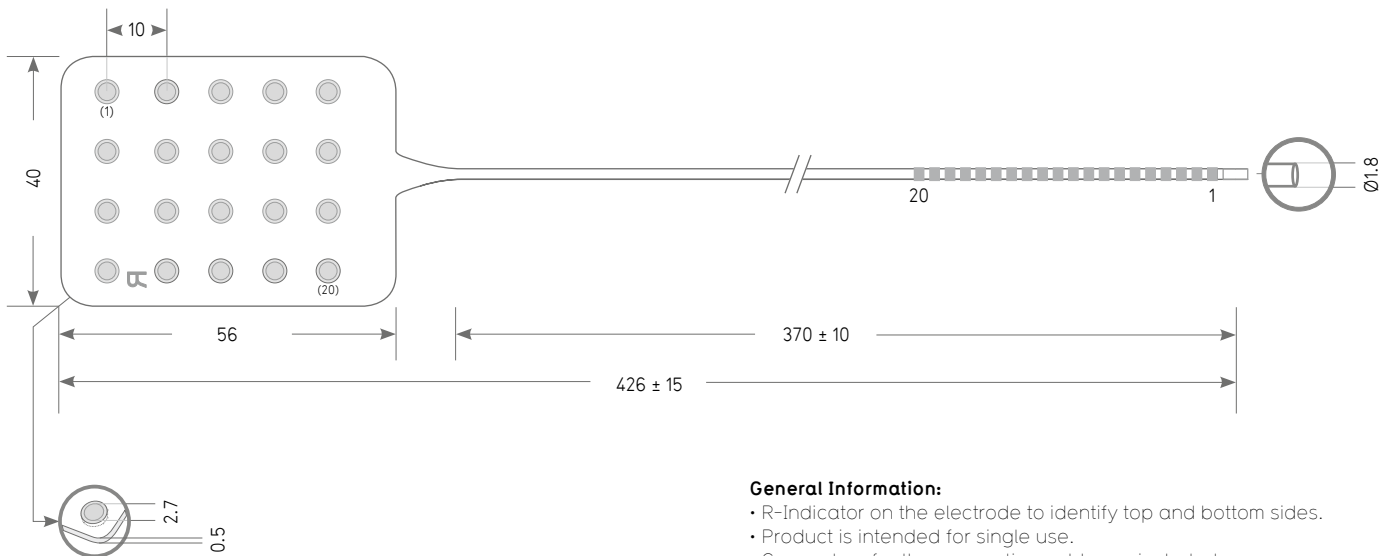

**View:**  
Contact openings  
facing upwards

### General Information:

- R-Indicator on the electrode to identify top and bottom sides.
- Product is intended for single use.
- Connectors for the connection cable are included.
- Product is supplied sterile.
- Contact diameter is 4 mm in total (contact opening 2.7 mm).
- Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	yellow-black	2011.1037.01	24 Contacts For more information on the connection system please see	4031.1003.00
	yellow-orange	2011.1037.02		
	individual	2011.1037.03		


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 4 x 8 Electrode

Soft and thin structures for increased flexibility and adaptability: 32 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

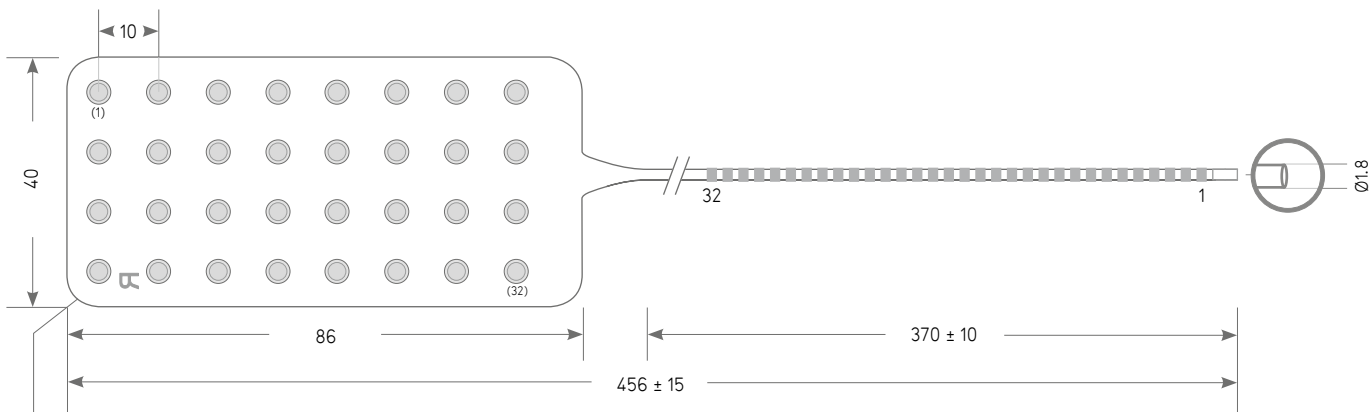

**View:**  
Contact openings  
facing upwards

- General Information:**
- R-Indicator on the electrode to identify top and bottom sides.
  - Product is intended for single use.
  - Connectors for the connection cable are included.
  - Product is supplied sterile.
  - Contact diameter is 4 mm in total (contact opening 2.7 mm).
  - Learn more about our material properties on

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	red-yellow red-black individual	2011.1017.01 2011.1017.02 2011.1017.03	32 Contacts For more information on the connection system please see	4031.1004.00


Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.





# 6 x 8 Electrode

Soft and thin structures for increased flexibility and adaptability: 48 contacts. Please contact us for other electrode configurations or designs. Different color codes are available. Cf.

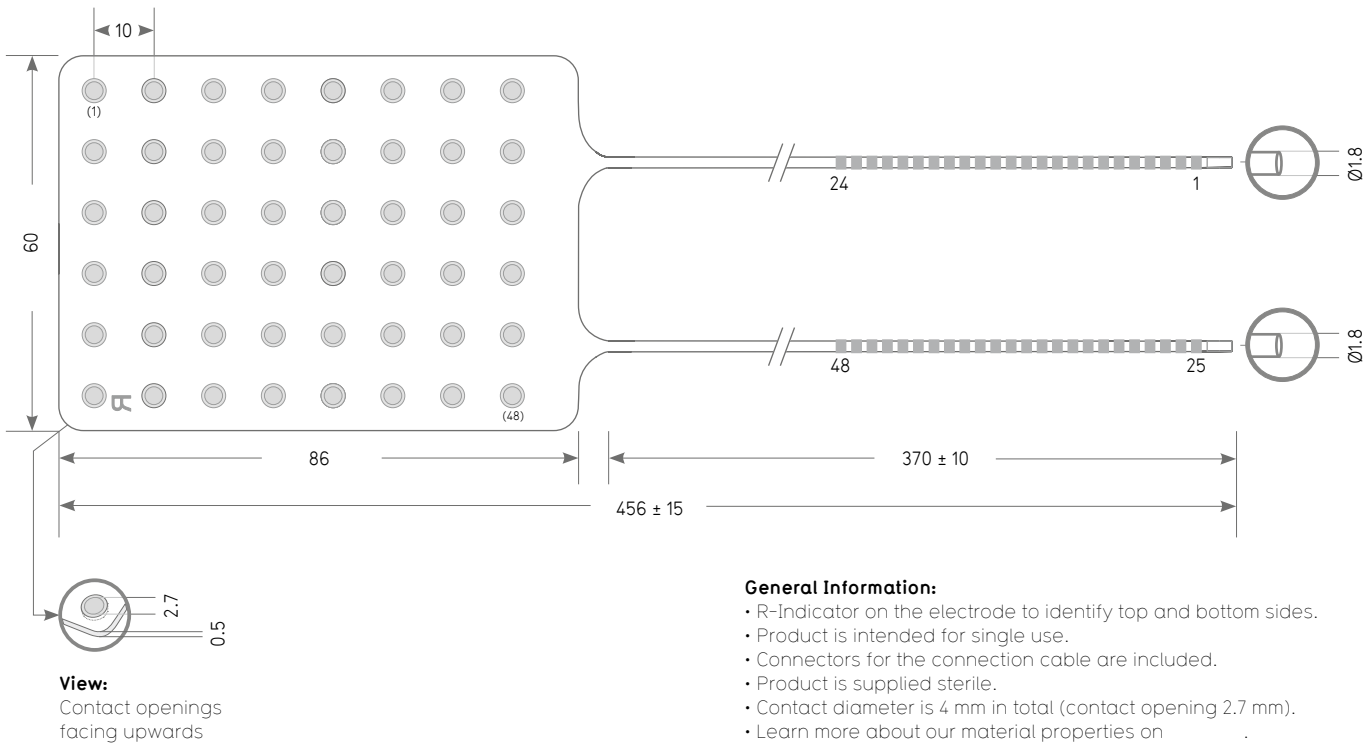

Product Configuration	Color Code	Catalogue No.	Accessory   Connection Cable	Catalogue No.
Platinum-Iridium	blue-orange	2011.1039.01	24 Contacts (2x)	4031.1003.00
	blue-green	2011.1039.02	For more information on the connection system please see	
	individual	2011.1039.03		

Copyright on all information and drawings is held by CorTec GmbH | Drawings represent the product in an abstract way and are not necessarily to scale | All dimensions in mm | For pricing please request a quotation.











# Accessory & Services

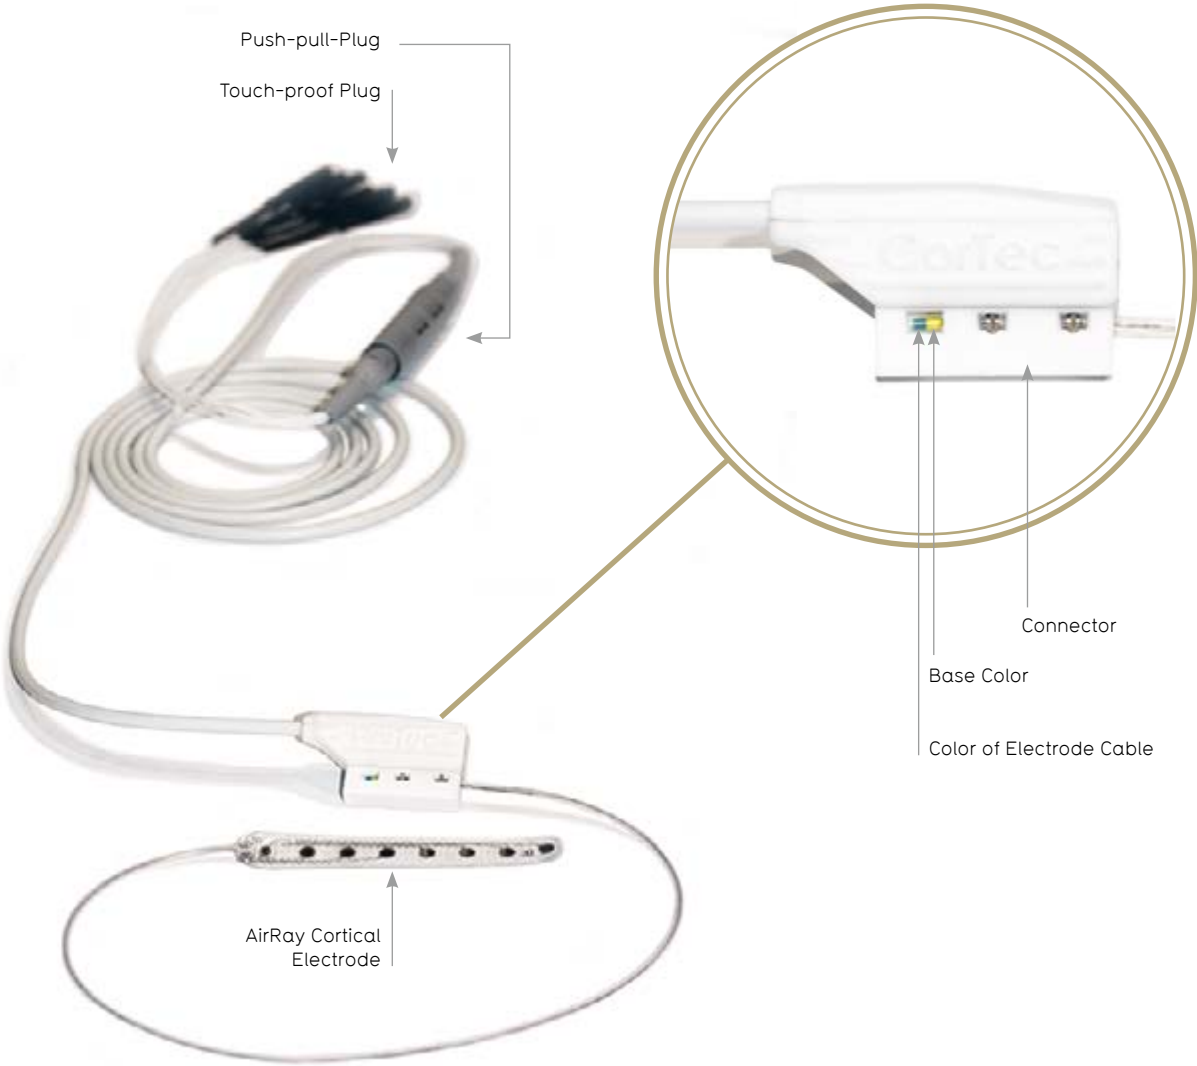



# Connection System

Our connection system allows you to connect °AirRay to neuromonitoring systems for recording and stimulation. Connection sizes with 3, 16, 24 and 32 contacts are available.

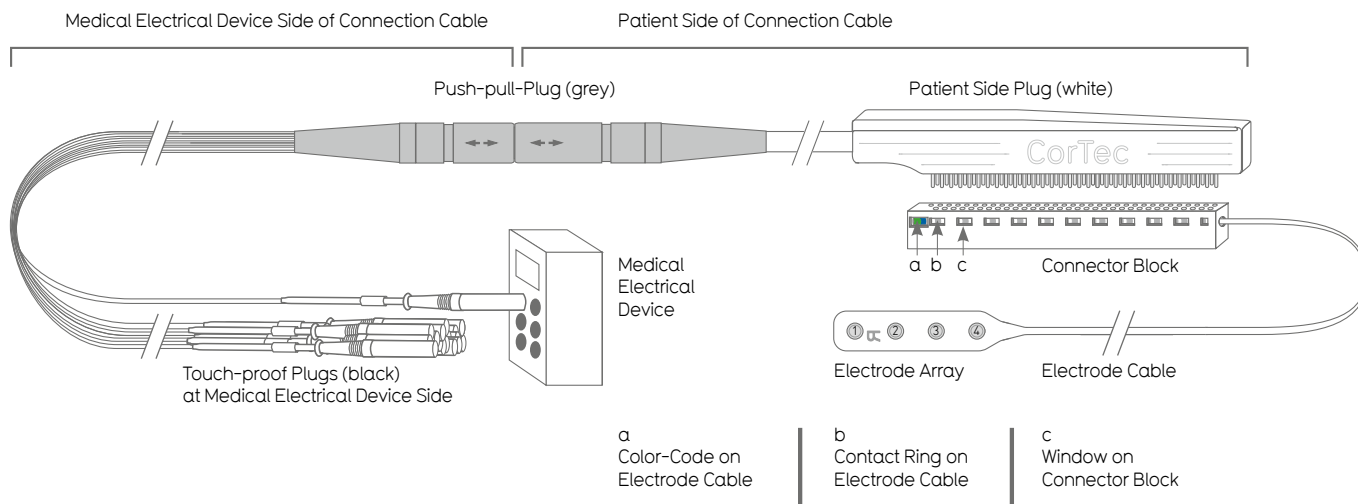


For connecting °AirRay Cortical Electrode to an amplifier or stimulator the electrode cable must be inserted into the connector block until the proximal end reaches the base of the connector block. The color marking must be visible completely through the large window at the closed end of the connector block.

The patient side plug (white) of the connection cable can then be inserted into the connector block. Connectors and plugs each have an additional single pin or an individual plug connection at one

end, which indicates the correct direction for connection. The connector block has to lock into the pins. The connection cable consists of two parts which are connected via a push-pull connector (grey). This simplifies repeated connection and disconnection of the electrode to an amplifier or stimulator.


The touch-proof plugs (black) at the medical electrical device side of the connection cable may remain connected to the amplifier or stimulator and do not need to be reconnected or reassigned for every session.





# Connection Cable

**Connection to the neuromonitoring system.** For the connection of the electrode you require one connection cable for each electrode cable. The required sizes and numbers are stated for each electrode as part of the order information.

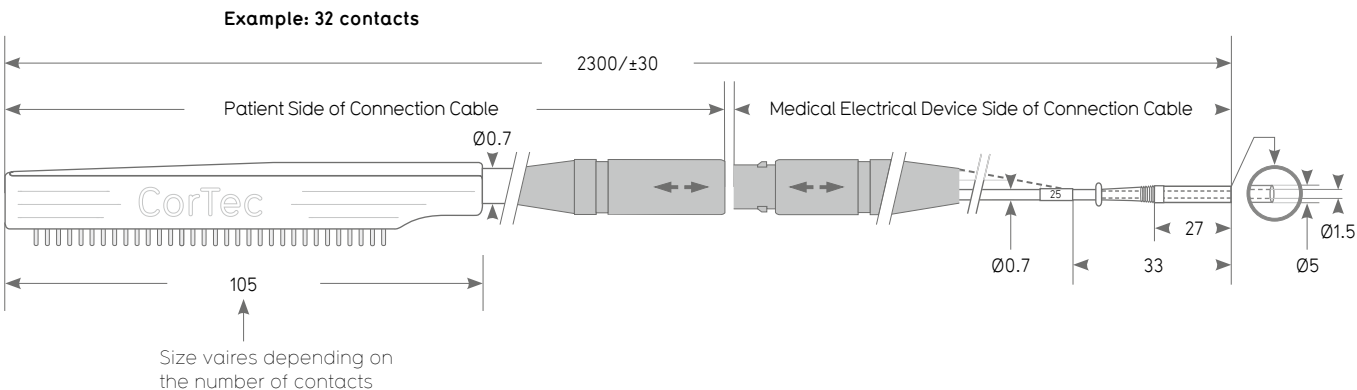


- Notes:**
- Product is supplied sterile.
  - Connectors for the connection cable are included in every electrode shipment.

Product Configuration	Catalogue No.	Product Configuration	Catalogue No.
8 Contacts	4011.1001.00	24 Contacts	4011.1003.00
16 Contacts	4011.1002.00	32 Contacts	4011.1004.00

Copyright on all information and drawings is held by **CorTec GmbH** | Drawings represent the product in an abstract way and are not necessarily to scale | **All dimensions in mm** | For pricing please request a quotation.







# Connector


**Connection to the connection cable.** Every electrode is shipped with all required connectors included. If you require additional connectors you can order them separately as well.

## Example: 32 Contacts

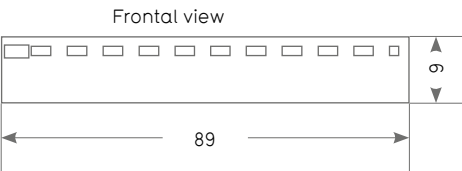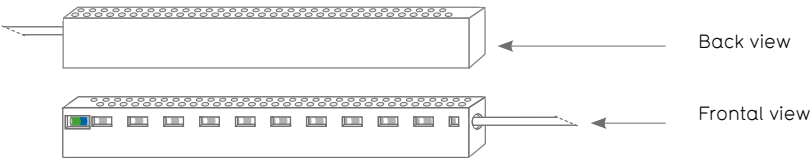


Size varies depending on the number of contacts

Lateral-view



Top view

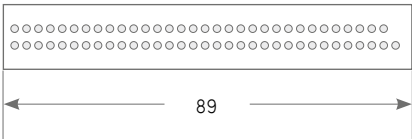

Size varies depending on the number of contacts

Product Configuration	Catalogue No.	Product Configuration	Catalogue No.
8 Contacts	4011.1001.00	24 Contacts	4011.1003.00
16 Contacts	4011.1002.00	32 Contacts	4011.1004.00

Copyright on all information and drawings is held by **CorTec GmbH** | Drawings represent the product in an abstract way and are not necessarily to scale | **All dimensions in mm** | For pricing please request a quotation.





# Materials

All of our electrodes are made using biocompatible materials such as silicone and Platinum-Iridium. The contact material is suitable for both recording and stimulation.

Platinum-Iridium is one of the standard materials commonly used for implants. The addition of Iridium provides the Platinum with additional stability. Platinum-Iridium is especially well suitable for stimulation.

Per default our °AirRay electrodes have a diameter of 2.7 mm. The following tables provide information on the typical impedances and maximum stimulation parameters of our products:

## Impedances (measured in physiological saline)


Contact Ø 2.7 mm	1 kHz	1 kHz
Platinum-Iridium	60 - 90 kΩ	0.2 - 0.5 kΩ

## Stimulation Parameters (maximum stimulation):


Pulse width (ms)	0.25	0.5	0.75	1.0	1.25	1.5	1.75	2.0
Amplitude (mA)	24.9	12.5	8.31	6.23	4.99	4.15	3.56	3.12







Values refer to symmetrical two-phase square pulses (with charge balancing) at a repetition rate of 100 Hz over a one minute period, for contacts with a diameter of 2.7 mm in Platinum-Iridium at 6.23µC/phase/pulse.

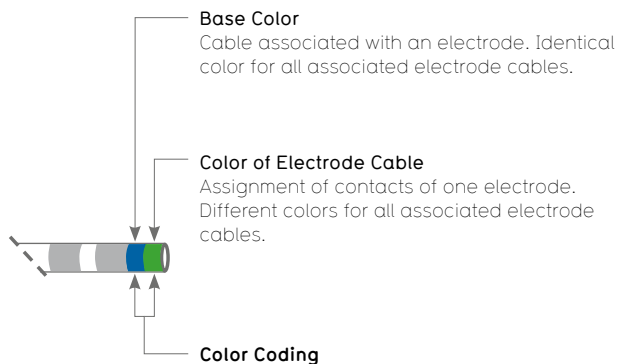



# Color-Coding Key



Color scale	Color Code
	YEL   yellow
	RED   red
	BLU   blue
	GRN   green
	ORG   orange
	BLK   black

All of our electrodes are supplied with color-coded electrode cables. At the end of the electrode cable there are two color markers that indicate:

- the association of the cable to a specific electrode, as well as
- the assignment of contacts of the same electrode. Color codes are explained in a code chart included in the accompanying documents of a product.

If you would like a specific color combination, simply attach the desired color code for the cables of your electrode according to the following example:

- °AirRay 8x8 in Platinum-Iridium, base color green, electrode cables in red and blue.
- Catalogue number „individual“ color code- base color/cable color RED, cable color BLU ...
- 2011.1016.03-GRN/RED, BLU...





## Ordering

All products can be ordered by referring to their catalogue number. Please make sure to indicate the color coding of your choice for electrode cables in your order. Please refer to .

Every electrode requires accessories.  
Connectors are included with every electrode.  
Connection cables have to be ordered separately.

Please refer to .

To submit your order please use the following contact information:

**CorTec GmbH**

Neuer Messplatz 3  
79108 Freiburg | Germany  
Fon: +49 761 70 888 222  
Fax: +49 761 70 888 399

Please contact us directly, if you are interested in specific electrode designs not in our catalogue.

We are happy to assist you!

Please also use these contact details to request information on our current prices.





Neuer Messplatz 3  
79108 Freiburg | Germany  
Fon: +49 761 70 888 222  
Fax: +49 761 70 888 399

